

DATASHEET - DIMENSIONS

MULTI-FASTER COUPLINGS - 4 LINES

1




2



Faster

	ARTICLE	
	FIXED PART (2)	MOBILE PART (1)
3/8"	14537	14538
1/2"	13634	13635

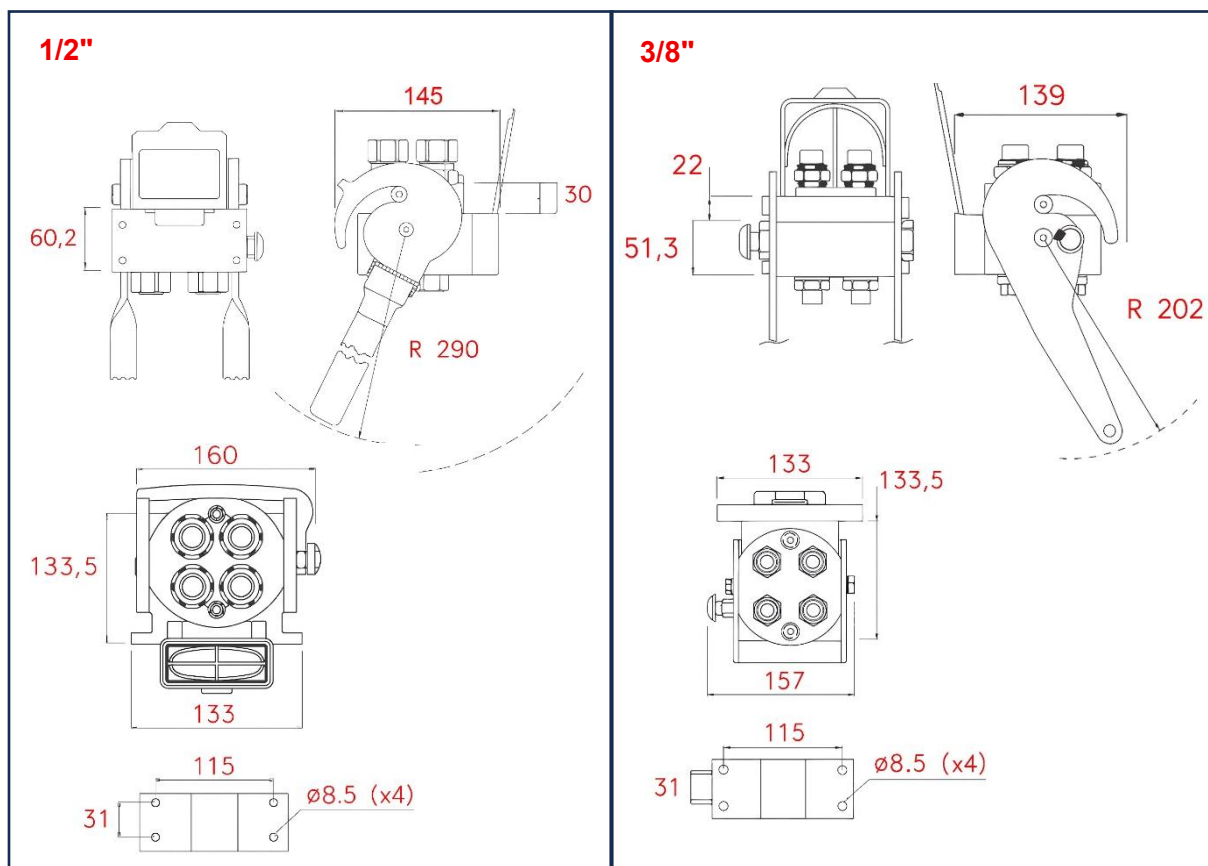

Article:	14537	14538	13634	13635
Supplier:	Italy			
Spillage:	0.008 ml		0.01 ml	
Max. working pressure:	250 Bar			
Temperature range:	-25 °C to 100 °C			
Connection:	4 x 3/8"		4 x 1/2"	
Product weight:	3,806 Kg	1,408 Kg	4,406 Kg	1,922 Kg
Max. flow rate:	40 l/min		70 l/min	
Material:	Aluminium and steel			

