


DATA SHEET – DIMENSIONS

MULTI-FASTER COUPLINGS 3PLK - 5 LINES

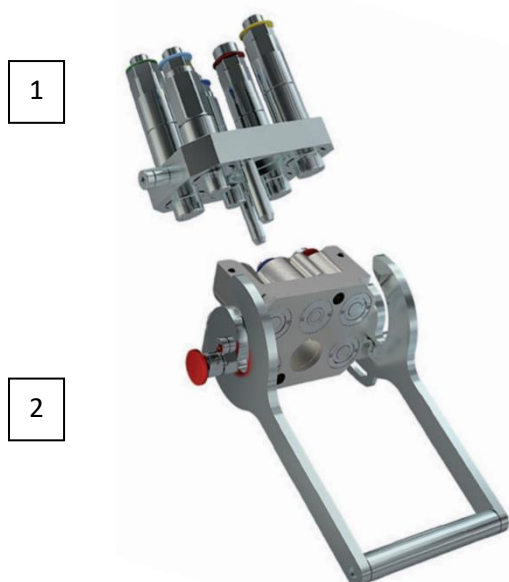

Faster

ARTICLE	
Fixed part (2)	Mobile part (1)
14548	14549

Article:	14548	14549
Supplier:	Italy	
Spillage:	0.02 ml	
Max. working pressure:	250 Bar	
Temperature range:	-25 °C to 100 °C	
Connection:	2 x 3/8", 3 x 9/16"	
Product weight:	9,5 Kg	4,7 Kg
Max. flow rate:	20 l/min for 3/8" and 35 l/min for 9/16"	
Material:	Aluminium and steel	

